

This product based on high quality resin system with elastic aggregates. According to the regulations, this product should be stored in dry, cool, ventilated warehouse away from fire and heat. The package must be kept airtight and handled carefully.



FEATURES & BENEFITS:

- Excellent durability
- Excellent weatherability
- Elastic touch
- Slippery proof
- Good physical and mechanical properties
- Resistance

Density: 1 . 3 5 KG/L

Use	Thinner	Cleaner	Method	Volume solid
<ul style="list-style-type: none"> • Laboratory • Parking lot • Workshop • Sports field • Hospital 	<ul style="list-style-type: none"> • X-10 polyurethane paint exclusive thinner 10 % w./w 	<ul style="list-style-type: none"> • X-10 polyurethane paint exclusive thinner 	<ul style="list-style-type: none"> • Airless spray • Brush • Roller • Filter 	<ul style="list-style-type: none"> • 55%

DRYING TIME: Substrate Temp	5 °C	23 °C	40 °C
To Touch/h	-	≤ 8	-
To Handle/h	-	≤ 24	-
To cure/h	-	≤ 24	-

Acrylic Polyurethane Floor Paint

JB-A-201 JB-A-203



Laboratory floor



Hospital operating room




Factory floor



Underground parking lot



The stadium

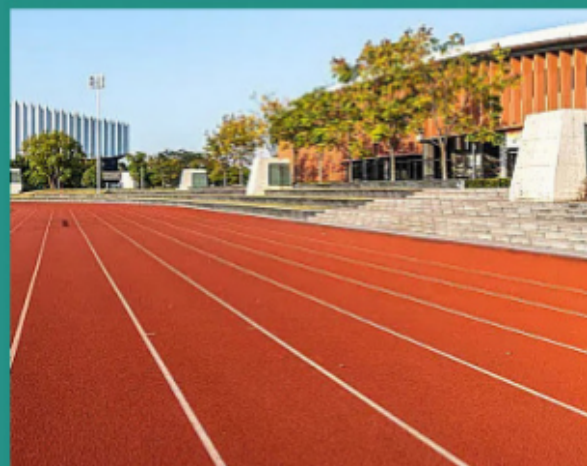

The runway